

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 June 2002 (13.06.2002)

PCT

(10) International Publication Number
WO 02/46001 A1

(51) International Patent Classification⁷: **B60R 1/072**

(21) International Application Number: PCT/NL01/00844

(22) International Filing Date:
20 November 2001 (20.11.2001)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1016676 22 November 2000 (22.11.2000) NL

(71) Applicant (for all designated States except US): **IKU HOLDING MONTFOORT B.V.** [NL/NL]; Waardsedijk Oost 9, NL-3417 XJ Montfoort (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BROUWER, Stephan, Frits** [NL/NL]; Hollanderstraat 22, NL-2517

HK The Hague (NL). **ROOSE, Marinus** [NL/NL]; Graaf Woldemarlaan 10, NL-3434 DM Nieuwegein (NL).


(74) Agent: **PRINS, A., W.**; Vereenigde, Nieuwe Parklaan 97, NL-2587 BN The Hague (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: MOVEMENT MECHANISM

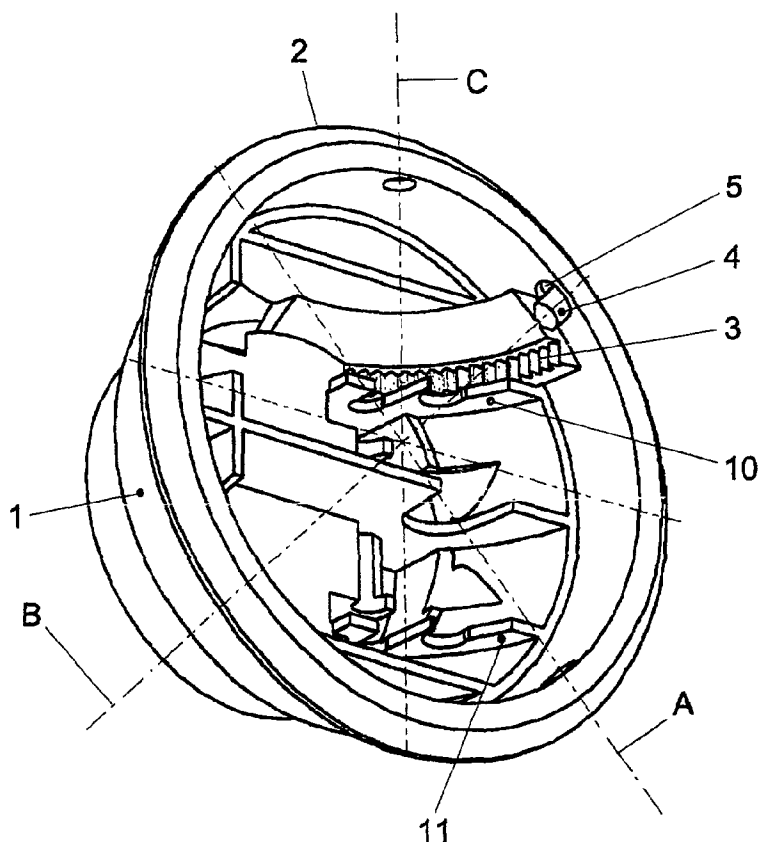

(57) Abstract: A movement mechanism comprises a substantially spherical holder and a substantially bowl-shaped ring, which, when inserted into each other, are rotatable relative to each other about at least one first axis (A), which lies in a plane which is substantially parallel with the top face of the holder. Driving means are provided for enabling movement of the holder relative to the ring. These driving means comprise a non-straight driving rod bearing-mounted in the holder and means for activating the driving rod. The driving rod is further connected with a driving part, which is rotatably mounted in a recess in the ring relative to a second axis (B), which second axis (B) lies in a plane equal or parallel to the top face of the ring, and which second axis (B) lies at an angle of approximately 90° to the first axis (A).



WO 02/46001 A1



European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

Title: Movement mechanism

The present invention relates to a movement mechanism, comprising a substantially spherical holder and a substantially bowl-shaped ring, which, when inserted into each other, are rotatable relative to each other about at least one first axis, which lies in a plane which is
5 substantially parallel with the top face of the holder, while driving means are provided for enabling movement of the holder relative to the ring, which driving means comprise a non-straight driving rod bearing-mounted in the holder, as well as means for activating the driving rod.

Such a movement mechanism can, for instance, be used for causing
10 an object fixedly connected to the holder to make a movement about one or two axes relative to the fixedly arranged bowl-shaped ring, and can be used for, for instance, wing mirrors of vehicles, in which a mirror plate can be mounted on the bowl-shaped ring, while the holder is mounted in the housing of the mirror plate, which housing can be fixed on a vehicle. Since
15 the driving means for the mirror plate can be fitted in the holder, a rather compact construction of the mirror-adjusting means can be obtained, which, in view of the increasingly stringent requirements imposed on the dimensions of such mirror-adjusting means, is of great importance.

A movement mechanism as described above is known for a
20 movement about two axes from International Patent Application PCT/NL00/00326, which comprises a dish located between a holder and a bowl, which is only rotatably connected with the bowl about a first axis, and which is only rotatably connected with the holder about a second axis. Here, the driving means comprise a driving rod for each of the rotation
25 possibilities about the first and the second axis, respectively. This driving rod is provided with a projection which is movable in and through a slot in the holder, and which engages in a second slot provided in the bowl, which

is perpendicular to the slot in the holder. Between this projection and therefore also the driving rod, on the one hand, and the slots in the holder and the bowl, on the other hand, too much play not avoidable in practice appears, as a result of which the accuracy of this drive does not meet the
5 highest requirements.

The invention has for its object to prevent this drawback and to realize a relative movement of a spherical holder relative to a bowl-shaped ring about at least one axis, while the compact construction of the movement mechanism is maintained and can even be further improved in
10 special embodiments.

To this end, according to the invention the movement mechanism is characterized in that the driving rod is connected with a driving part, which is rotatably mounted in a recess in the ring relative to a second axis, which second axis lies in a plane equal or parallel to the top face of the ring, and
15 which second axis lies at an angle of approximately 90° to the first axis.

In a special embodiment the driving rod has the shape of a ring segment, which is rotatable about a third axis (C), which lies in a plane equal or parallel to the top face of the holder, and which lies at an angle of approximately 45° to the first axis (A). This embodiment is particularly
20 important for reasons of space saving.

The above special embodiment, however, is connected with a problem. The third axis (C) lies substantially at an angle of 45° to the second axis (B). When the ring segment rotates relative to this third axis (C), the driving part will not be able to make a pure rotating movement in
25 the recess in the ring. To solve this problem, different possibilities have been found.

In a first embodiment according to the invention the recess in the ring has the shape of a slotted hole and the driving part has the shape of a cylinder, while the length of the slotted hole is substantially oriented in a
30 direction parallel to that of the first axis (A).

In a second embodiment the driving part is movably connected with the driving rod in such a manner that, when the driving rod rotates, a relatively small displacement of the driving part in substantially a direction parallel to that of the first axis (A) becomes possible.

5 In a third embodiment the bowl-shaped ring has a recess, which is movably arranged in the ring in such a manner that, when the driving rod rotates, a relatively small displacement of the recess in substantially a direction parallel to that of the first axis (A) becomes possible.

Although in all of the three above embodiments the driving rod is
10 preferably provided with a toothing and in all of these cases the driving rod can carry out a rotation movement, which is defined relative to an axis which substantially coincides with the third axis (C), this selection of the driving rod is a condition for a fourth embodiment. Here, the means for activating the driving rod are further formed by a driving system provided
15 with a driven toothed wheel. A fourth solution of the above problem is obtained when the driving system is slidable in a direction which is substantially parallel to that of the third axis (C). Here, the driven toothed wheel will be provided with a shaft part, which is radially bearing-mounted in a groove in the driving rod.

20 To enable a movement of the holder relative to the ring about two substantially mutually perpendicular axes, the driving means are provided with a second non-straight driving rod, which is connected with an associated driving part, which is rotatably mounted in a second recess in the ring relative to the first axis (A), while the relevant driving rods are
25 arranged in the holder substantially parallel to each other. Exactly by arranging the driving rods parallel to each other, an additional space is obtained in the holder for the associated motors with transmission means.

The invention not only relates to a movement mechanism, but also to a wing mirror for a vehicle provided with such a movement mechanism.

The invention will now be explained in more detail with reference to the accompanying drawing. In this drawing:

Fig. 1 is a perspective view of the movement mechanism according to the invention;

5 Fig. 2 is a top plan view of the movement mechanism in Fig. 1;

Fig. 3 is a side view of this movement mechanism according to the arrows P;

Fig. 4 shows an exemplary embodiment of the driving means for the movement mechanism;

10 Figs. 5A-5C show, seen from different angles, an embodiment of the driving rod with the driving part;

Figs. 6A-6D show, seen from different angles, another embodiment of the driving rod with the driving part; and

15 Figs. 7A-7E show, seen from different angles, a further embodiment of the driving rod with the driving part.

Corresponding parts in these figures are indicated by equal reference numerals.

The movement mechanism according to Figs. 1-3 is shown for a movement of a substantially spherical holder 1 relative to a substantially bowl-shaped ring 2 about a first axis A, which lies in a plane which is substantially parallel with the top face of the holder 1. The cardanic suspension of the holder and the ring are not shown any further, because this is not important for the description of the invention. The driving means provided for enabling movement of the holder 1 relative to the ring comprise a non-straight driving rod 3 bearing-mounted in the holder 1 as well as means for activating the driving rod 3. The driving rod 3 has the shape of a ring segment rotatable relative to an axis C. This axis C lies at an angle of 45° to the axis A. The ring segment is provided with teeth meshing with the teeth of a driven toothed wheel 6 of a driving system 9 shown (see Fig. 4).

20 This driving system 9 comprises a motor and associated transmission

25

30

means; these components are not shown, however, for simplicity's sake. By actuating the stepping motor the toothed wheel 6 is driven through the transmission means, which has the result that the ring segment is displaced in the holder. Through the connection of the driving rod 3 with a driving
5 part 4 which is rotatably mounted in a recess 5 in the ring 2 relative to an axis B perpendicular to the axis A, a displacement of the driving rod 3 in the holder means that the driving part 4 displaces the ring 2 relative to the holder 1. The driving part 4 is designed as a cylindrical element.

If the driving rod 3 was arranged in such a manner that it could be
10 rotated about the axis A, then the recess 5 could be circular, and if the holder and the ring rotated relative to each other about the axis B, then the driving part 4 could make a rotating movement about its axis coinciding with the axis B. For this situation the driving rod 3 and the driving part 4 are shown in Figs. 5A-5C. In the embodiment of Figs. 1-3 the driving rod 3,
15 however, can only move parallel to a plane perpendicular to the axis C. During this movement the driving part 4 is moved somewhat laterally while taking the ring 2 along. In the embodiment shown this is rendered possible by giving the recess 5 the shape of a slotted hole. For this situation the driving rod 3 and the driving part 4 are shown in Figs. 6A-6D. The reason
20 for which the driving rod 3 is movable parallel to a plane perpendicular to the axis C resides in the fact that the movement mechanism described herein will be used in practice for a movement of the holder relative to the ring about two axes, namely A and B, and that for a rotation about one of the two axes it is favorable to actuate both motors provided for the purpose.
25 For a movement mechanism of another type this use is already described in the above International Patent Application PCT/NL00/00326. Here, the driving mechanism 3 is arranged on the side of the partition 10.

Diametrically relative to a plane extending parallel to this partition through the center of the movement mechanism a partition 11 is provided parallel to
30 the partition 10. For a two-axis movement of the holder 1 relative to the

ring 2 a second driving rod is arranged on the side of this partition, that is to say in the same way as the driving rod 3 is arranged on the side of the partition 10. Of course, the driving means required therefor are arranged in the holder. In that case the arrangement of the two driving rods gives an
5 additional space saving compared to the situation in which the two driving rods are perpendicular to each other, as is the case in the above international patent application. Because the movements about the two axes A and B are otherwise realized in a similar manner, in the embodiment depicted the movement mechanism is only shown for a
10 movement about the axis A.

In another embodiment the recess is kept circular indeed, but the driving part 4 is somewhat movably connected with the driving rod 3. This situation is shown in Figs. 7A-7E, of which Fig. 7A is a magnified view of a detail in Fig. 7B. Here, the driving part 4 is connected with the driving rod
15 through an elastic element 12.

In yet another embodiment, as shown in Fig. 4, the recess 5 is also kept circular. A laterally directed movement of the driving part 4 occurring during the displacement of the driving rod 3 is prevented by providing the toothed wheel 6 with a shaft part 7 which is radially bearing-mounted in a
20 groove 8 in the driving rod 3. During the displacement of the driving rod 3 a slight axial movement is possible between the shaft part 7 and the groove 8.

The invention is not limited to the exemplary embodiments described herein with reference to the drawing, but comprises all kinds of modifications thereof, of course as far as falling within the scope of
25 protection of the appended claims. Thus, for instance, it is possible to take up the laterally directed movement of the driving part 4 occurring during a displacement of the driving rod 3 by providing the recess 5 in a plate piece which is laterally displaceable relative to the ring 2. It is further possible to provide a crown toothing, instead of the toothing shown in Fig. 4, on the

surface 13 of the driving rod 3. The driving system 9 can then be arranged in a position rotated through 90°.

CLAIMS

1. A movement mechanism, comprising a substantially spherical holder (1) and a substantially bowl-shaped ring (2), which, when inserted into each other, are rotatable relative to each other about at least one first axis (A), which lies in a plane which is substantially parallel with the top
5 face of the holder (1), while driving means are provided for enabling movement of the holder (1) relative to the ring (2), which driving means comprise a non-straight driving rod (3) bearing-mounted in the holder (1), as well as means (6, 9) for activating the driving rod (3), characterized in that the driving rod (3) is connected with a driving part (4), which is
10 rotatably mounted in a recess (5) in the ring (2) relative to a second axis (B), which second axis (B) lies in a plane equal or parallel to the top face of the ring (2), and which second axis (B) lies at an angle of approximately 90° to the first axis (A).
2. A movement mechanism according to claim 1, characterized in that
15 the driving rod (3) has the shape of a ring segment, which is rotatable about a third axis (C), which lies in a plane equal or parallel to the top face of the holder (1), and which lies at an angle of approximately 45° to the first axis (A).
3. A movement mechanism according to claim 1 or 2, characterized in
20 that the recess (5) has the shape of a slotted hole and the driving part (4) has the shape of a cylinder, while the length of the slotted hole is substantially oriented in a direction parallel to that of the first axis (A).
4. A movement mechanism according to claim 1 or 2, characterized in
25 that the driving part (4) is movably connected with the driving rod (3) in such a manner that, when the driving rod (3) rotates, a relatively small displacement of the driving part (4) in substantially a direction parallel to that of the first axis (A) becomes possible.

5. A movement mechanism according to claim 1 or 2, characterized in that the ring is provided with a recess (5), which is movably arranged in the ring (2) in such a manner that, when the driving rod (3) rotates, a relatively small displacement of the recess in substantially a direction parallel to that of the first axis (A) becomes possible.

6. A movement mechanism according to claim 2, characterized in that the driving rod (3) is provided with a toothing and can carry out a rotation movement, which is defined relative to an axis which substantially coincides with the third axis (C).

10 7. A movement mechanism according to claim 6, characterized in that the means for activating the driving rod (3) are formed by a driving system (9) provided with a driven toothed wheel (6).

8. A movement mechanism according to claim 7, characterized in that the driving system (9) is slidable in a direction which is substantially parallel to that of the third axis (C).

9. A movement mechanism according to claim 7, characterized in that the driven toothed wheel (6) is provided with a shaft part (7), which is radially bearing-mounted in a groove (8) in the driving rod (3).

10. A movement mechanism according to any one of claims 2-9, as far as depending on claim 2, characterized in that, to enable a movement of the holder relative to the ring about two substantially mutually perpendicular axes, the driving means are provided with a second non-straight driving rod, which is connected with an associated driving part, which is rotatably mounted in a second recess in the ring relative to the first axis (A), while the relevant driving rods are arranged in the holder substantially parallel to each other.

11. A wing mirror for a vehicle, provided with a movement mechanism according to any one of the preceding claims.

Fig. 3

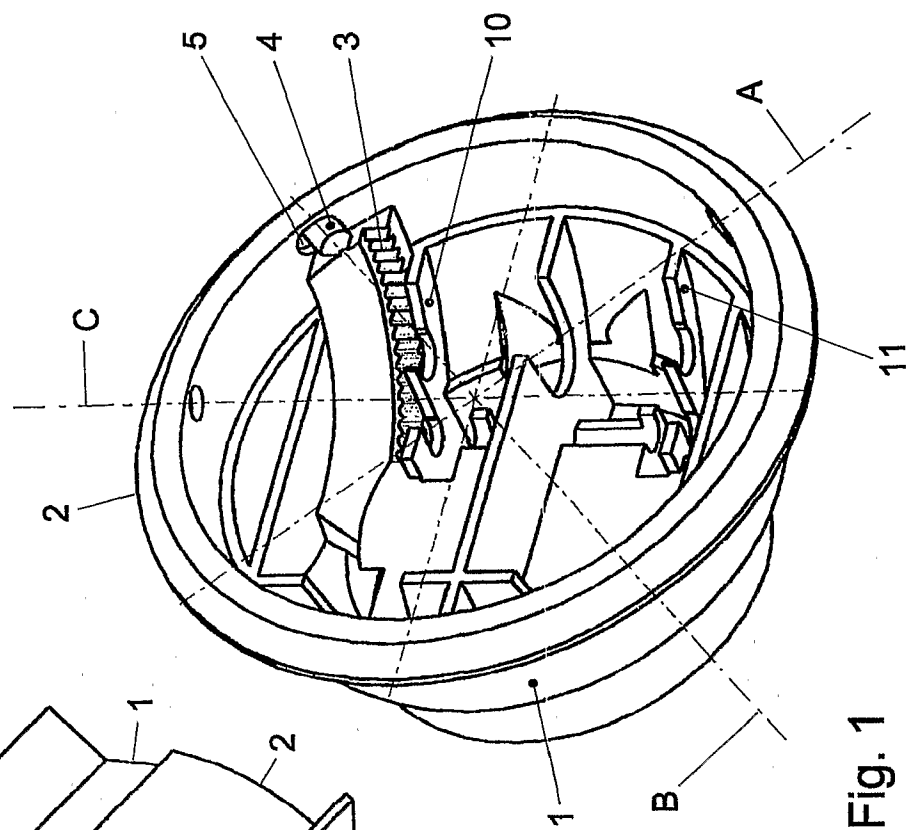
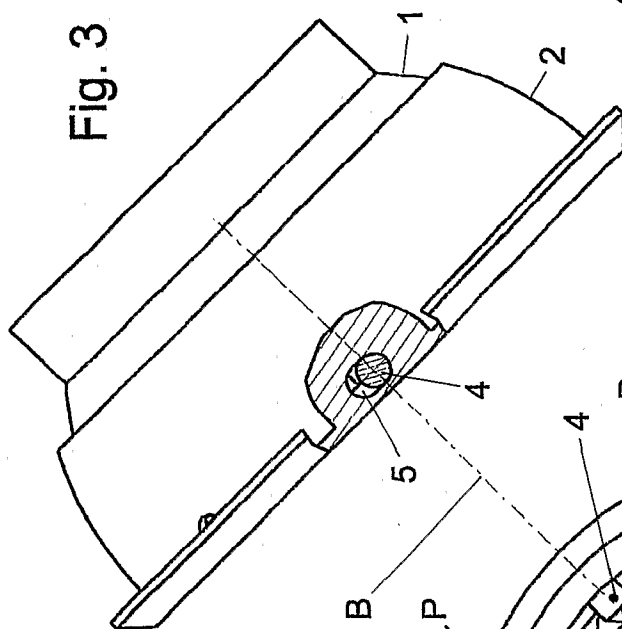


Fig. 1

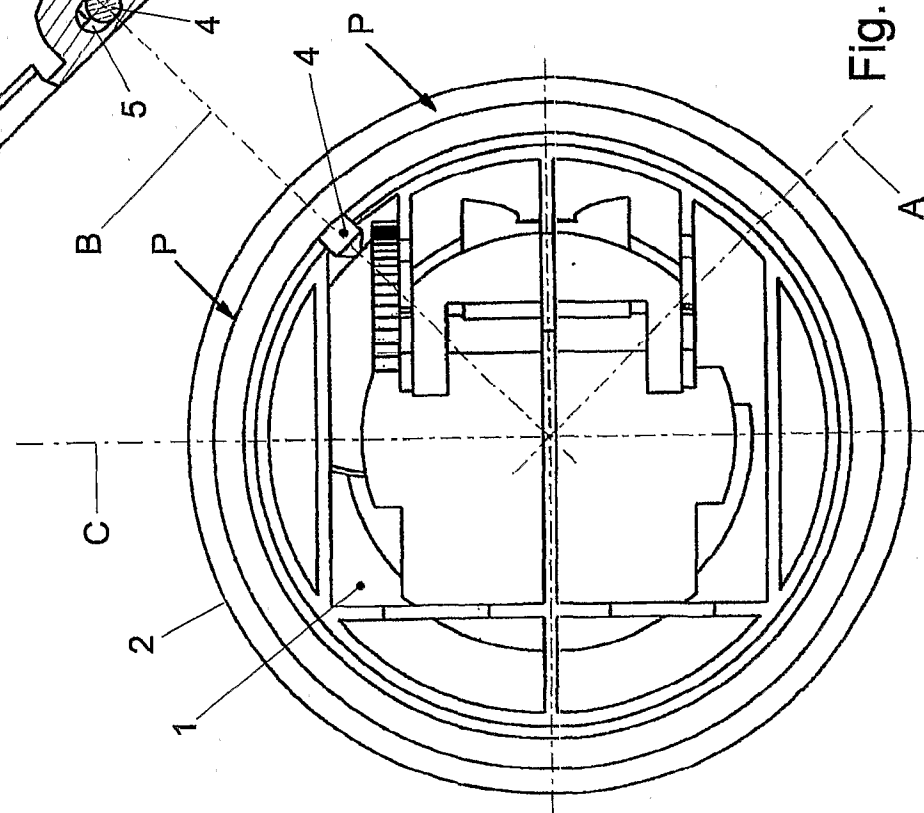


Fig. 2

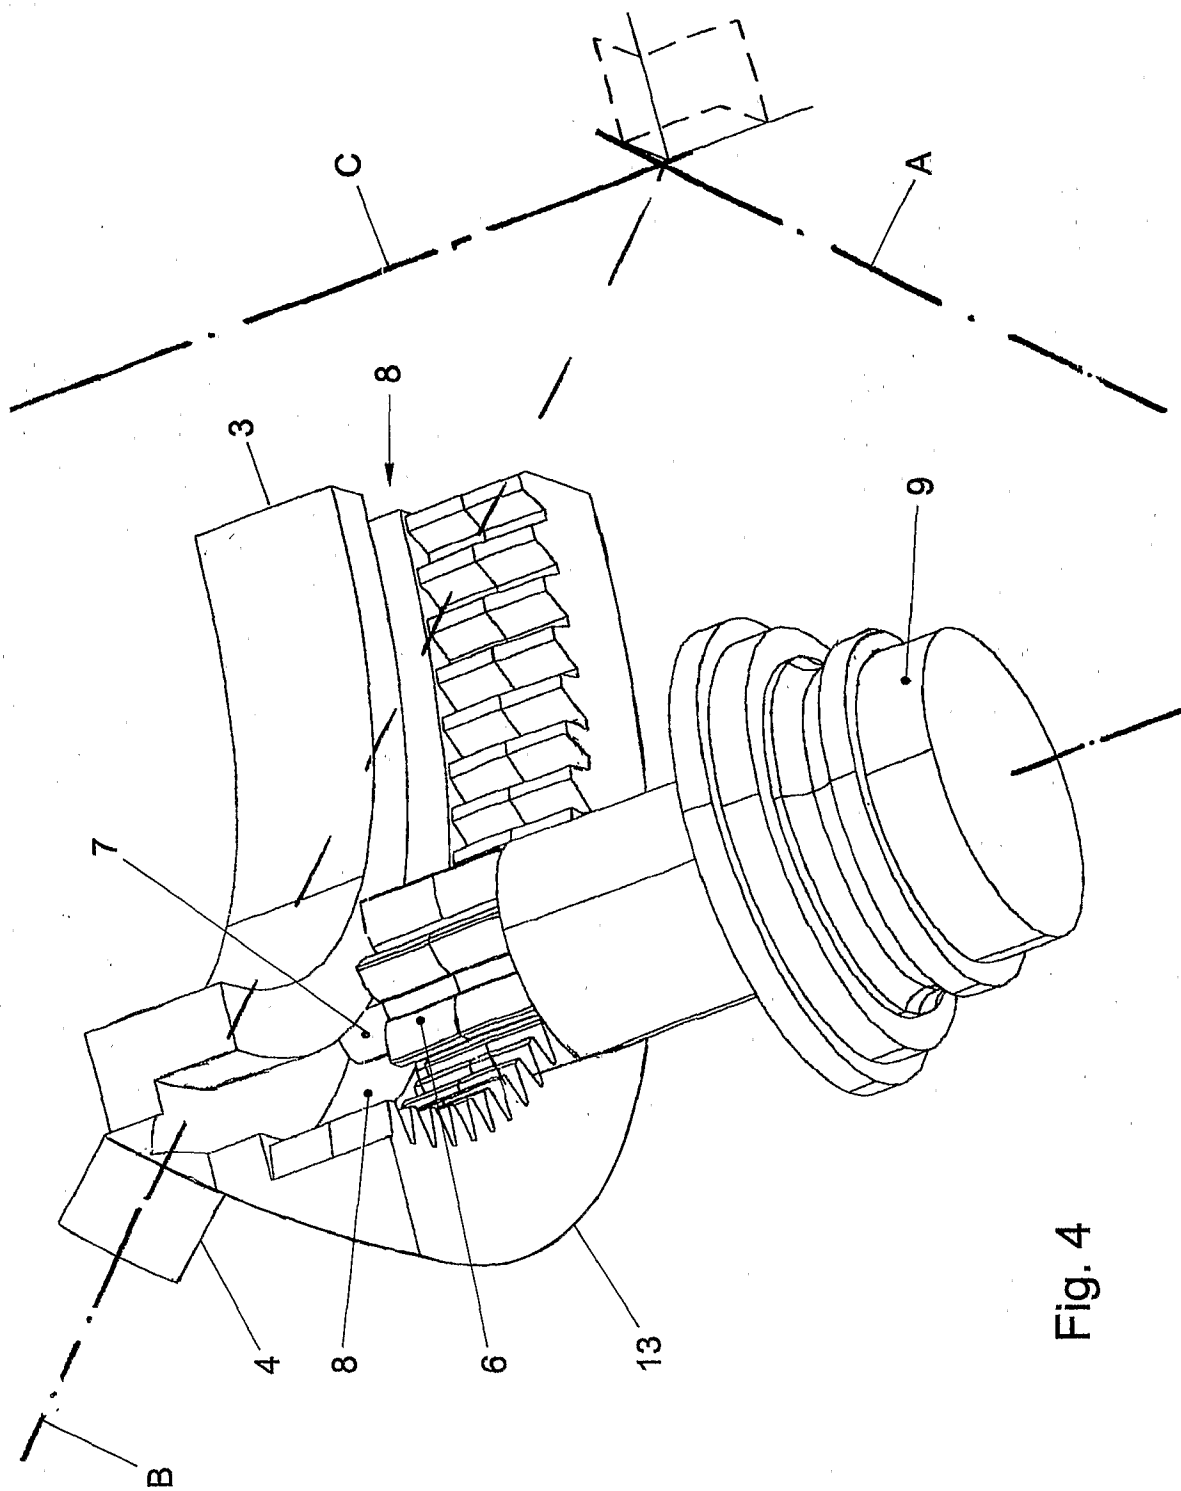


Fig. 4

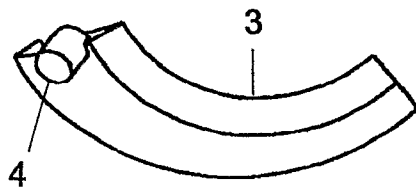


Fig. 5A

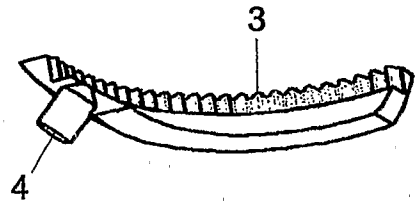


Fig. 5B

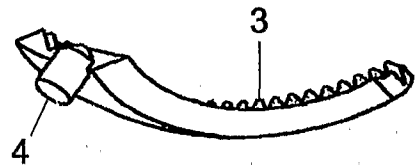


Fig. 5C

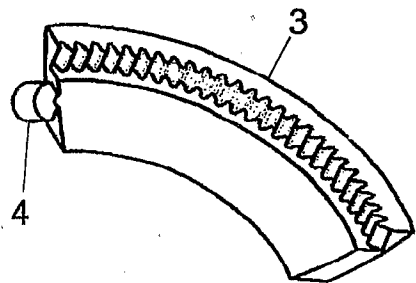


Fig. 6A

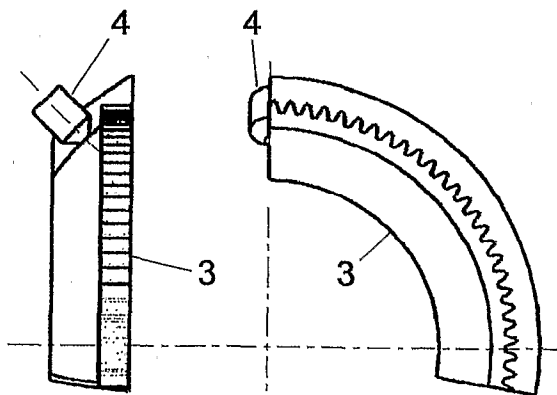


Fig. 6B

Fig. 6C




Fig. 6D

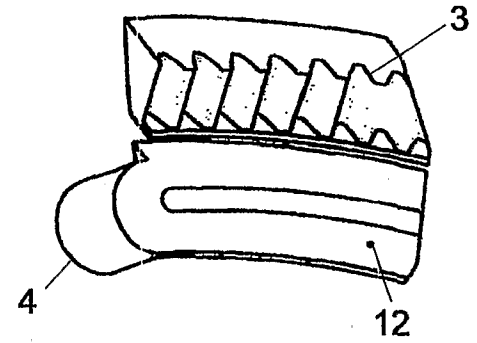


Fig. 7A

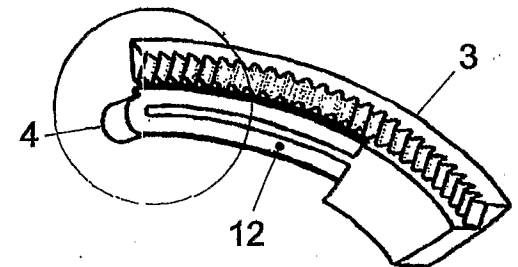


Fig. 7B

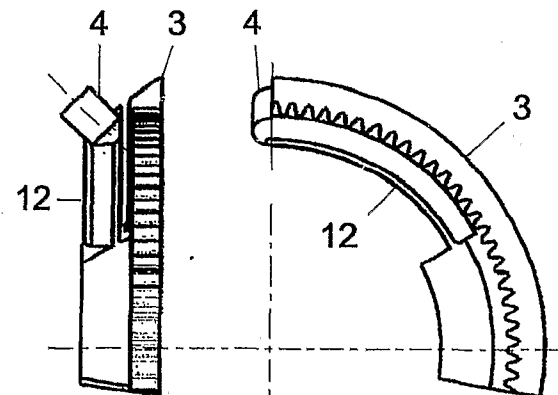


Fig. 7C

Fig. 7D




Fig. 7E

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B60R1/072

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B60R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---|-----------------------|
| P,A | DE 200 17 163 U (BUHLER) 11 January 2001 (2001-01-11) the whole document --- | 1-11 |
| P,A | DE 100 06 220 A (OECHLER) 23 August 2001 (2001-08-23) the whole document --- | 1-11 |
| A | WO 95 05295 A (LOWELL) 23 February 1995 (1995-02-23) page 15, line 11 -page 16, line 2 --- | 1,2,4-7, 10,11 |
| A | DE 199 19 526 A (BUHLER) 27 July 2000 (2000-07-27) --- | |
| A | DE 199 19 527 A (BUHLER) 27 July 2000 (2000-07-27) --- | |
| | -/-- | |



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

7 March 2002

Date of mailing of the international search report

13/03/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Knops, J

INTERNATIONAL SEARCH REPORT

PCT/NL 01/00844

| C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT | | |
|--|--|-----------------------|
| Category ° | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| A | DE 199 19 528 A (BUHLER) 2 November 2000 (2000-11-02) ---- | |
| A | DE 199 19 529 A (BUHLER) 24 August 2000 (2000-08-24) ---- | |
| A | WO 98 31565 A (MAGNA REFLEX) 23 July 1998 (1998-07-23) ----- | |

INTERNATIONAL SEARCH REPORT

PCT/NL 01/00844

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|---|---------------------|----------------------------|---------------------|
| DE 20017163 | U | 11-01-2001 | DE 20017163 U1 | 11-01-2001 |
| DE 10006220 | A | 23-08-2001 | DE 10006220 A1 | 23-08-2001 |
| WO 9505295 | A | 23-02-1995 | US 5467230 A | 14-11-1995 |
| | | | AT 203218 T | 15-08-2001 |
| | | | AU 676599 B2 | 13-03-1997 |
| | | | AU 7405794 A | 14-03-1995 |
| | | | CA 2169060 A1 | 23-02-1995 |
| | | | CN 1129427 A ,B | 21-08-1996 |
| | | | DE 69427760 D1 | 23-08-2001 |
| | | | DE 69427760 T2 | 31-10-2001 |
| | | | EP 0713457 A1 | 29-05-1996 |
| | | | ES 2158901 T3 | 16-09-2001 |
| | | | JP 9501632 T | 18-02-1997 |
| | | | WO 9505295 A1 | 23-02-1995 |
| DE 19919526 | A | 27-07-2000 | DE 19919526 A1 | 27-07-2000 |
| | | | DE 19919527 A1 | 27-07-2000 |
| | | | DE 19919529 A1 | 24-08-2000 |
| DE 19919527 | A | 27-07-2000 | DE 19919527 A1 | 27-07-2000 |
| | | | DE 19919526 A1 | 27-07-2000 |
| | | | DE 19919529 A1 | 24-08-2000 |
| DE 19919528 | A | 02-11-2000 | DE 19919528 A1 | 02-11-2000 |
| DE 19919529 | A | 24-08-2000 | DE 19919529 A1 | 24-08-2000 |
| | | | EP 1063125 A1 | 27-12-2000 |
| | | | US 6341536 B1 | 29-01-2002 |
| | | | DE 19919526 A1 | 27-07-2000 |
| | | | DE 19919527 A1 | 27-07-2000 |
| WO 9831565 | A | 23-07-1998 | AT 405501 B | 27-09-1999 |
| | | | AT 6797 A | 15-01-1999 |
| | | | AT 203722 T | 15-08-2001 |
| | | | BR 9805896 A | 25-01-2000 |
| | | | DE 29824489 U1 | 01-03-2001 |
| | | | DE 59801112 D1 | 06-09-2001 |
| | | | WO 9831565 A1 | 23-07-1998 |
| | | | EP 0895499 A1 | 10-02-1999 |
| | | | JP 2000507187 T | 13-06-2000 |
| | | | US 6174062 B1 | 16-01-2001 |